

PERFO-AK

Anchor Tile


Technical Specifications

Material:	PE / PP
Colour:	Black
Closed surface area (load bearing):	50% + 50%, in two tiers
Surface texture:	raised points for grip / drainage channels
Load bearing capability:	up to 60 tonnes/m ² * * depending on ground conditions and preparation
Dimensions (individual tile)**	300 x 300 x 75 mm
**not including connecting lugs	
Weight per tile:	approx. 515 g
Dimensions as supplied (made-up section):	121 x 91 cm 3 x 4 Perfo tiles
Area per made-up section:	approx. 1.10 m ²
Weight per made-up section:	approx. 6.2 kg
No. of sections per pallet:	47
Total surface area per pallet:	approx. 52 m ²
Weight per pallet:	approx. 300 kg
Height per pallet:	approx. 205 cm

Resistant to oil, solvents, salt water,
most acids.

UV and frost resistant

Does not rot

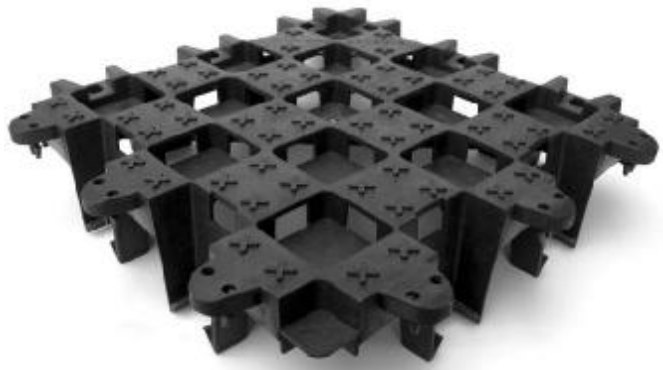

Non-perforated white tiles for marking purposes,
eg. to demarkate parking bays or for centre-lines
are also available on request.